



RECHARGEABLE SEALED LEAD ACID BATTERY

SPECIFICATION

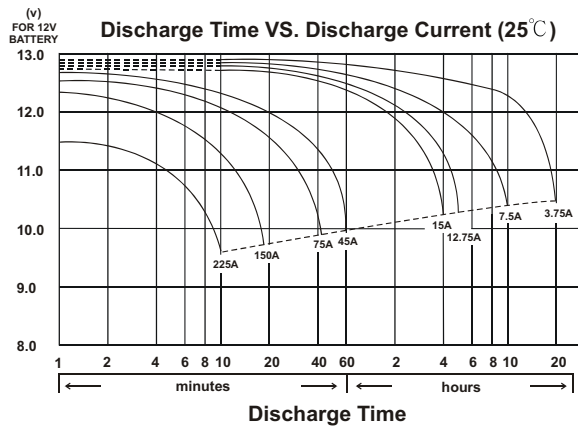

mm(inch)

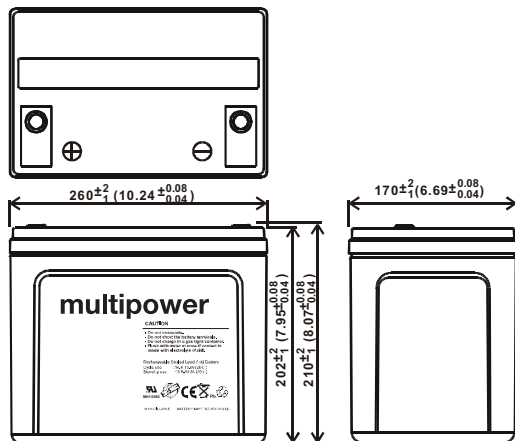

MP75-12C

Nominal Voltage (V) 12V

Nominal Capacity

20 hour rate (3.75A to 10.50V)	75Ah
10 hour rate (7.5A to 10.50V)	75Ah
5 hour rate (12.75A to 10.20V)	63.75Ah
1C (75A to 9.60V)	33.75Ah
3C (225A to 9.60V)	27Ah

Weight 26.032kg(57.40Lbs)

Internal Resistance (at 1KHz) 4 mΩ

Maximum Discharge Current for 30 seconds : 750A

Maximum Discharge Current for 5 seconds : 1500A

Operating Temperature Range

Charge	0°C (32°F) to 40°C (104°F)
Discharge	-15°C (5°F) to 50°C (122°F)
Storage	-15°C (5°F) to 40°C (104°F)

Charge Retention (shelf life) at 20°C (68°F)

1 month	92%
3 month	90%
6 month	80%

Charging Methods at 25°C (77°F)

Cycle use:
 Charging Voltage 14.4 to 15.0V
 Maximum Charging Current: 22.5A

Standby use:
 Float Charging Voltage 13.50 to 13.80V

Life expectancy :

Cycle Use:
 100% depth of discharge 225 cycles
 80% depth of discharge 250 cycles
 50% depth of discharge 750 cycles

Standby Use: 3-5 years

Case Material ABS
 (Option: 94-HB & 94V-0 flame retardant case)

Terminal F8